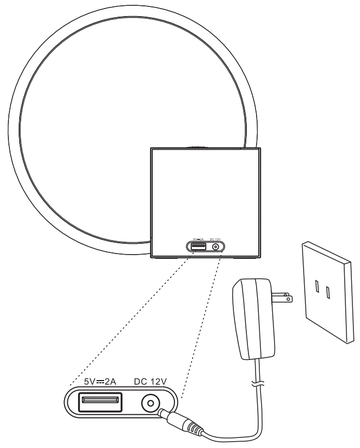
VIVILUMENS

Get Started Quickly



Natural Sound

① Short press to select white noises
Long press to turn off




② 

Adjust volume

12/24 Hours Switch


Short press to switch 12/24



Tips: If you choose the 12-hour display when setting the alarm, please pay attention to distinguish the time of AM or PM.


Time Setting


① Long press the button




② 

Set the hour

③ 


④ 

Set the minute


⑤ 

Confirm and exit


AL1/AL2 ON/OFF

① 

Short press to switch between AL1 and Al2

② 

AL1,AL2 ON

③ 


AL1,AL2 OFF

AL1/AL2 Select

① Long press the button




Default AL1


② 

AL1 Time Setting (Bells)

① Long press the button



Default Time

② 

Select hour

③ 

Set the hour

④ 


Select minute

⑤ 


Set the minute

⑥ 

Default volume 06

⑦ 

Adjust volume

⑧ 

Default bell “01”

⑨ 

Select bells

⑩ Complete AL1 setting

AL2 Time Setting (Sunrise Lamp / Sunrise Lamp with Bells)

① Long press the button



Default Time

② → Al2 mode

③ 

Select hour

④ 

Set the hour

⑤ 

Select minute

⑥ 

Set the minute

⑦ 

Default volume 06

⑧ 

Adjust volume

If you choose "00" means Sunrise Lamp without bells.

⑨ 

Default bell “01”

⑩ 

Select bells

⑪ Complete AL2 setting

Timing Setting of Natural Sound

① Choose a white noise track

②

③


Select the timing time in sequence

Snooze Setting




After the alarm goes off, pressing the snooze button will activate the alarm/light again in 10 minutes


Digital Screen Brightness Setting




Shot press SNOOZE button to set the brightness level in turn

Desk Lamp Use





Touch the knob to adjust lamp brightness level in turn



VIVILUMENS


24-hour Customer Service Support

Contact us:

Service@vivilumens.com

VIVILUMENS

Desk Lamp Scene Speaker AJ300



Please read carefully before use

Function Introduction

- 2 Sets of Alarm Clocks
- Wake-Up Lamp(In Δ2 Mode)
- Built-in 10 Natural Sounds & Countdown 30mins, 60mins, 90mins
- Dimmable Digital Time Display & Snooze Function
- Dimmable Desk Lamp Function with 3-level Touching & Breathing Lamp Function
- USB Output 5V 2A (10W Max)
- Power Off Memory Function (Maintain Approximately 3-5 Hours)

Technical Parameters

Model No	AJ300	Rated Voltage	12V/1A
Lamp Power	4W	Breathing Lamp	1W
White Noise Power	70dB	USB Output	5V/2A (Max 10W)
Color Temperature	400±250K	Horn Parameters	Φ40mm 4Ω3W
Power Off Memory	3-5 Hours	Product Size	225x51x228mm

Get Started Quickly

Lamp operation

- Plug in the power adapter included in the package at the "DC 12V" on the back of the product, and the time will display normally after plugging in to indicate that it is working normally.
- Short touch the lamp tube to light up the desk lamp, then short touch again toactivate 4-level dimming function,which includes: dim light，medium light，brightest light，breathing light---off.

Key Introduction

Power On/Off/Track Switching:

- In the clock mode, short press this button to start the natural sound function.
- Short press this button for the track switching function, including 01 to 10 cycle selection respectively: 01 birdsong, 02 ocean wave , 03 flowing water, 04 bonfire, 05 summer night, 06 Tibetan bowl, 07 fan, 08 rain, 09 music box, 10 clock ticking.
- Press and hold this button for 2 seconds to turn off.

Countdown:

- In natural sound mode, short press this button to select 30 mins / 60 mins /90 mins/OFF, and at the same time the indicator light in the upper left corner will turn on.The countdown will automatically confirm in 3 seconds with a “beep” sound and return to the time mode. Short press ∧and ∨ button to adjust the appropriate volume.
- After reaching the set countdown time, the natural sound is turned off and the light is turned off.

Clock Setting:

- In the clock mode, long press this button for 2 seconds to enter clock setting. “hour” digits starts flashing,then short press ∧and ∨ buttonto adjust.Press ◷ agian or wait for 10 seconds to confirm.
- In time display mode,short press this button to switch between 12 or 24 hour format.

Alarm Clock Setting:

Set Your Alarm Clock Δ1 (Ringtone)

- Long press 🔔 key for 2 seconds to enter the alarm setting Δ1 and Δ2 , the default AL1 symbol flashes together with “hour” and “minute” , short press ∧ or ∨ key to select Δ1 or Δ2 mode.
- Short press 🔔 key again to enter the alarm clock setting and the “hour” is flashing,then press ∧or∨ key to select.Then short press 🔔 key to enter the “minute” flashing， press ∧ or ∨ key to select.
- Short press 🔔 again for alarm volume setting, then press ∧ or ∨ key to select suitable volume “V01 to V12” ; press 🔔 key again for alarm ringtone track setting, then press ∧ or ∨ key to select track “01 to 15” .
- Lastly，short press 🔔 or wait for 10 seconds to confirm with a “beep” sound and return to time display.

Set Your Alarm Clock Δ2 (ONLY Sunrise Lamp / Sunrise Lamp with Ringtone)

- Long press 🔔 key for 2 seconds to enter the alarm setting Δ1 and Δ2 , the default AL1 symbol flashes together with “hour” and “minute” , short press ∧or ∨ key to select Δ1 or Δ2 mode.
- Then short press the ∧ or ∨ key to select the volume “V00 to V12” ; (“V00” is without ringtone)，then press 🔔 key for the alarm ringtone track setting, then press the ∧ or ∨ key briefly to select the track “01 to 15” ;
- Lastly，short press 🔔 or wait for 10 seconds to confirm with a “beep” sound and return to time display.

The introduction of Δ2 Sunrise Lamp and Sunrise Lamp with Ringtone

- If you only need the wake-up light function and don't require the alarm sound, please select the AL2 alarm clock. Choose volume “V00” . Please note that the wake-up light on AL2 needs to be set 10 minutes before the alarm time. The light will gradually become brighter from dark, and after 10 minutes, it will reach the maximum brightness.

The introduction of the mode Δ1 and Δ2

- Δ2 is built wake-up light function.The light gradually changes from dark to brightest 10 minutes in advance,and the light reaches the brightest at the same time the alarm clock rings. Δ1 rings with a natural sound.

Turn Off the alarm clock

In the clock mode,short press the 🔔 button, Δ1 will light up to indicate “Alarm clock1” . Short press ∧ / ∨ button to turn on/off Δ1. Short press 🔔 button again to operate Δ2 .

SNOOZE Snooze:

- **In clock mode，short press SNOOZE button to adjusts the brightness of display screen in 3 levels: brightest，medium，slightly dim，and off in a loop.**
- During alarm or snooze mode,short press button on 🔔 or a 2-second long press on SNOOZE key will turn off the alarm for the day.
- When the alarm goes off and the SNOOZE button is pressed，the indicator light on the alarm will flash until the alarm rings again.
- When the Δ2 goes off,short press the SNOOZE button ,light intensity will gradually increase again.After 10 minutes of snoozing,the alarm will ring again.
- The SNOOZE function is set to a maximum of 3 times,after which the alarm for the day will be turned off.If the SNOOZE button is not pressed, the alarm will turn off for the day after 30 minutes of ringing.

Power-off Memory Function

After unplugging the DC power supply (the internal battery keeps the time running normally, it can last for about 3 hours after the power is cut off). However, the clock will continue to run when the DC power is reconnected, the time will be displayed normally again.

Customer After-sale Service:

This product comes with a 12-month warranty period.
Should you encounter any issues with your purchase,please do not hesitate to contact us at Service@vivilumens.com. Our service team is committed to providingyou the highest level of customer support.