Balance Bike Assembly Instructions

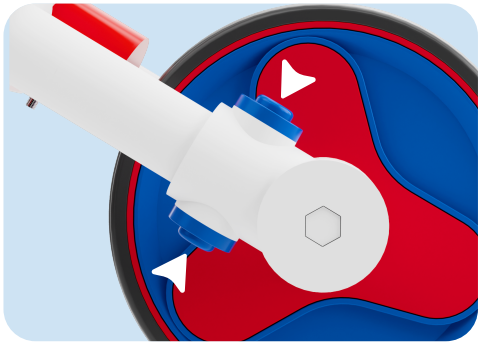

Step 1: To remove the rear wheels, press and hold the blue locking buttons then pull the rear wheels off.

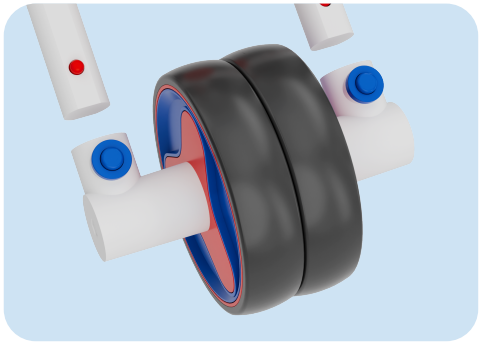

Step 2: Reinstall the rear wheels in the opposite direction as shown. Press and hold the red locking buttons then insert the wheels into the rear forks.

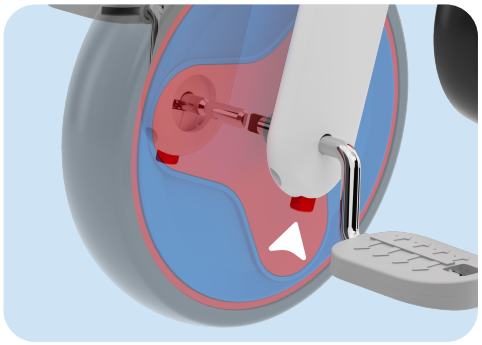

Step 3: Press the red locking button, then pull the pedal out.



warning

WARNING:
To Be Assembled by An Adult

Safety Instructions & Product Information

- Users and guardians must read this manual carefully before use and keep it for future reference. Failure to follow the instructions may compromise child safety.
- Never leave the child unattended while riding.
- This tricycle is suitable for children ages 1–4.
- Maximum load capacity: 44 lbs.
- Before assembly, this vehicle may have sharp edges, points, or small parts. Assembly must be performed by an adult. When riding, children must wear shoes, protective gear, and a helmet.
- Do not use this tricycle in dangerous areas such as rough or uneven terrain, streets, roads, slopes, or near swimming pools. Doing so may lead to traffic accidents or drowning hazards.
- Before each use, inspect the tricycle and ensure the locking mechanisms is working properly.
- Overloading, improper use, or using incorrect spare parts may damage the tricycle, cause it to malfunction, or make it unsafe.
- If the tricycle becomes unstable or damaged, stop using it immediately.
- Do not hang any objects on the handlebars, as this may affect stability.
- Do not use near open flames or other heat sources.

Trike Assembly Instructions



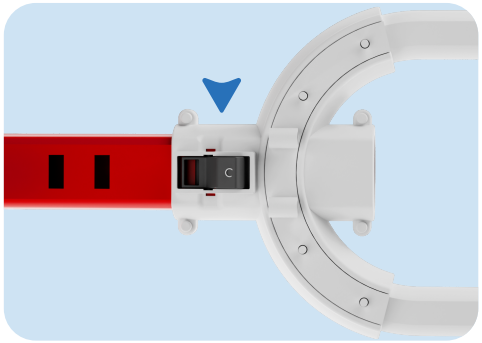

Step 3: Frame and rear fork come pre-assembled. Press the grey locking button and choose one of the two slots to adjust the bike length, then release the button to lock it in place.

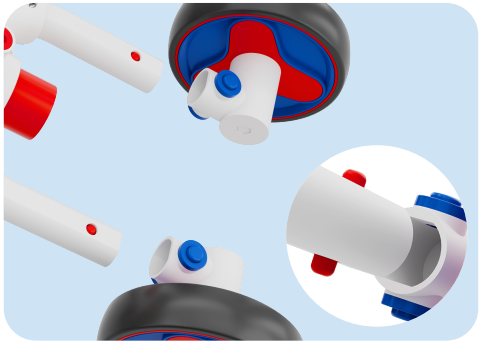

Step 4: To assemble rear wheels, align the alignment tab with the alignment slot on the rear fork. Press and hold the locking buttons, then insert the rear fork into the axle tubes till they click into place.

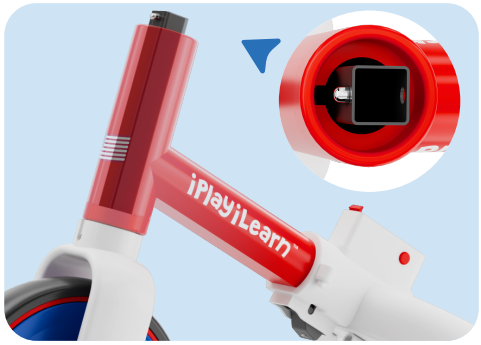

Step 1: Assemble front wheel and frame. Insert the front fork into the front frame. Align the locking button on the fork with the slots inside the frame, then slide the fork through.

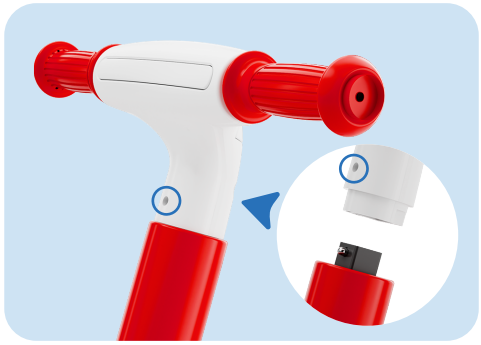

Step 2: Insert the front fork into the handlebar. Align the locking button with the slot on the front of the handlebar, then push down until it clicks into place.

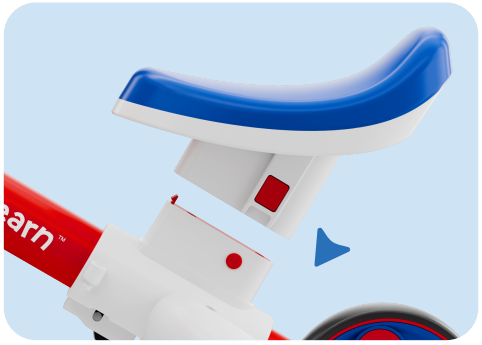

Step 5: Press and hold the two red locking buttons on the rear fork, then insert the seat onto the rear fork. Push down until it clicks into place.

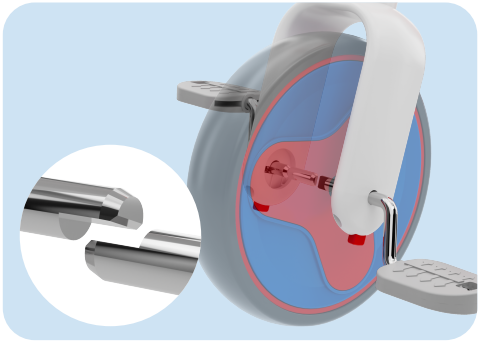

Step 6: Insert the pedal connector into the slot on the front wheel. Rotate the pedal until it aligns then push in and lock into place. Install the second pedal on the opposite side, making sure the pedals are positioned opposite each other.